

# VISSONIC

Professional Audio Video Manufacturer

## Full Digital Wired Conference Units


### Product Datasheet



VISSONIC ELECTRONICS LTD.

Think Solution

## Application diagram

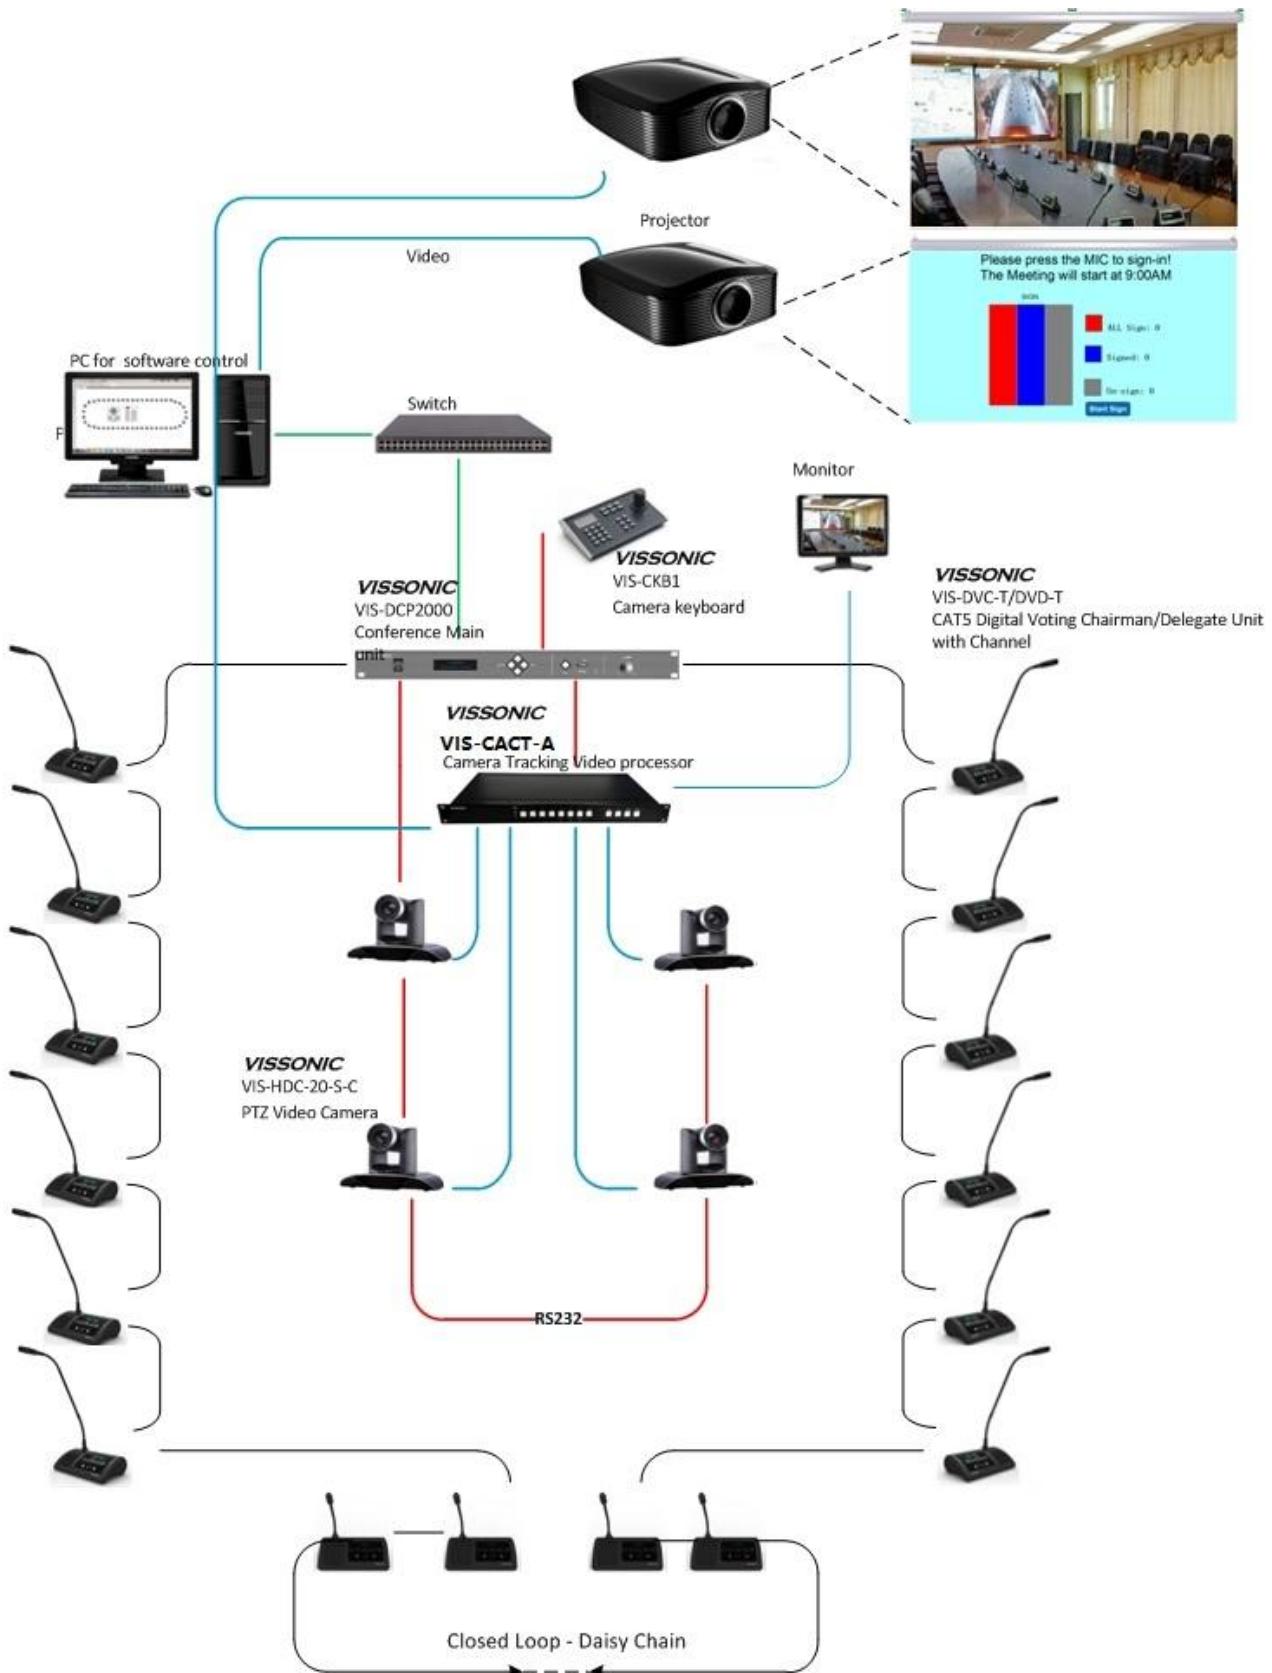

**CLEACON Series VIS-DSC-T/ VIS-DSD-T**

CAT5 Wired Dual Channels Chairman/Delegate Unit

**Features**

- Stylish, low profile design with touchable interface
- Standard CAT5e and RJ45 connectors are used in CLEACON series to provide more convenient on projects and maintenance.
- The connection cable of units are either hiding underneath or from the rear of the unit, makes it convenient for different request of installation
- Dual channels selectors work with two earphone jackets design
- Interpretation function with 64 channels selector which can display the language and channel number (Insert the earphone and the channel selector is active)
- OLED screen, providing excellent brightness, contrast, wide viewing angle but low power consumption
- Internal high-fidelity loudspeaker
- Line-in interface which allows microphone or other line-in device like cell phone, laptop to pass audio through to perform teleconference
- The unique AUDIO-LINK digital ring network technology achieve full-digital signal transmission and processing, completely avoid the RF interference from cell phone or similar devices.
- “Hand-in-Hand-Loop-Network” connection makes the system always working perfectly and more reliable.
- The unit showing time/date on the screen. Timer on display to set certain time for each delegate to speak, will remind user or close the MIC automatically.
- All units can be configured as Chairman or Delegate unit through software settings based on model VIS-DSC-T.

**Functions**

- Compliance with IEC 60914, GBT 15381-94
- The unique AUDIO-LINK digital ring network technology achieve full-digital signal transmission and processing, completely avoid the RF interference from cell phone or similar devices.
- Single CAT5e cable transmits 64 channels of audio and various information.
- High fidelity sound by zero loss audio transmit technology, 48K audio sampling frequency, 20Hz~20KHz response frequency

- "Hand-in-Hand-Loop-Network" connection makes the system always working perfectly no matter changing discussion unit or having any malfunctioned units
- This system assigned to each unit independently ID to avoid duplicate ID conflict
- AGC (Automatic Gain Control)/AFC (Adaptive Feedback Cancellation)/ANC (Active Noise Control)/Mix (Auto-Mix) technology
- Build-in functions for intercom
- Hot-swap for any system unit, and the controller has auto-recovery function
- Precise cardioid directional microphone capsule with anti-wind microphone foam, with two-color LED indicator
- Interpretation function with 64 channels selector which can display the language and channel number (Insert the earphone and the channel selector is active)
- Button for MIC ON/OFF, Priority & Apply Answer button for chairman unit
- Built-in high-fidelity speakers, it automatically mutes to prevent howling when press MIC ON
- Head-set interface in both sides with volume adjust
- Without using PC software, our conference controller still owns following settings:
  - Limit on the number of speaking persons: By Setting the number of active units at the same time (Number is 1/2/4/6/ units)
  - Discussion modes:
    - "OPEN" Free for all, limited by the active units setting by controller, "**OVERRIDE**" First in First out,
    - "**VOICE**" Can activate MIC by detecting sound without press button, "**APPLY**" To apply then to speak
      - Chairman unit has priority to close all other units or mute them temporarily
      - Chairman unit can consent the request for speaking from delegate
      - Support simultaneous language interpretation
- Work with VIS-CDC series HD camera and VIS-CATC-A switcher, it can realize camera auto tracking function
- The unit showing real time on the screen, and count-down timer for speaking person.

## *Control & Indicators*

Microphone with two-color LED ring, red indicates speaking status, green indicates request to speak.

128x32 OLED display with volume bar, clock, time span of microphone activating, interpretation channels and language, MIC ON/OFF and other information.

2 groups of channels selecting buttons

MIC ON/OFF buttons with indicators

Chairman unit with priority button and consent button for the delegates

## *Interfaces*

Pluggable gooseneck microphone base

2x 3.5mm stereo headphone jack

1x 3.5mm stereo input jack

2x RJ45 connectors for daisy chain

### ***Technical Parameters***

Button: Touchable interface  
Sound Pickup: heart type capacitance  
Display: OLED display 128 × 32  
Sensitivity: -46 dBV / Pa  
Maximum power consumption: 2.0W  
Directivity: 0 ° / 180 ° > 20 dB (1 kHz)  
Headphone load: 16Ω  
headphone volume: 10mW  
Headphone jack: 3.5mm stereo  
Input impedance: 2kΩ  
SNR: 70dB  
Frequency response: 20 ~ 20000Hz  
Connection: CAT5 / CAT6 cable + snap  
Equivalent noise: 20dBA (SPL)  
Main material: ABS  
The maximum sound pressure: 125dB (THD <3%)  
Weight: 1.1kg (with microphone)  
Dimension: 195L × 120W× 60H mm (without microphone)  
Operating temperature: 0 °C to + 55 °C  
Color: Black

### ***Item Model for Order***

VIS-DSC-T.....Dual channels Chairman Unit, microphone and cable not include  
VIS-DSD-T.....Dual channels Delegate Unit, microphone and cable not include  
VIS-M330.....330mm Microphone, with anti-wind foam cover  
VIS-M410.....410mm Microphone, with anti-wind foam cover  
VIS-M485.....485mm Microphone, with anti-wind foam cover  
VIS-M600.....600mm Microphone, with anti-wind foam cover