

VISSONIC

Professional Audio Video Manufacturer

Full Digital Wired Conference Units


Product Datasheet



VISSONIC ELECTRONICS LTD.

Think Solution

Application diagram

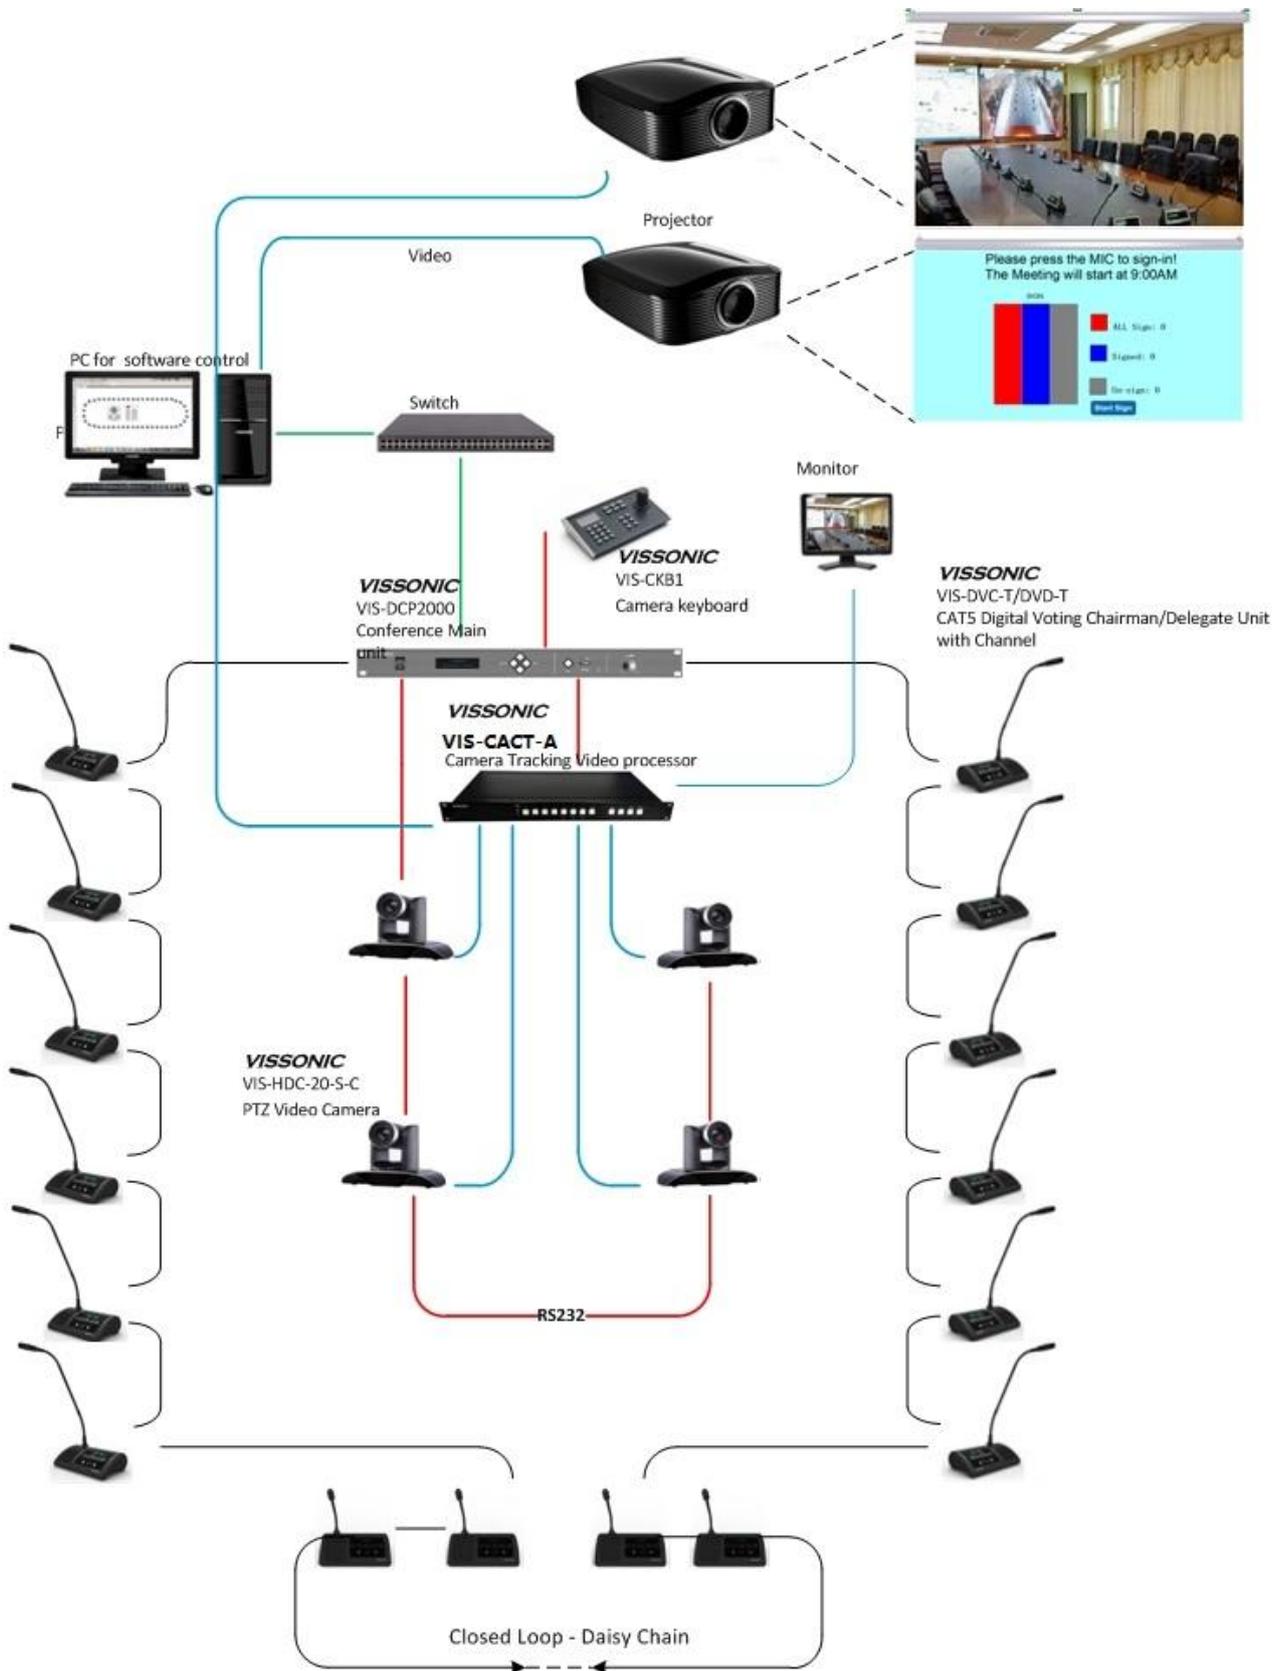

CLEACON Series VIS-DIC-T/ VIS-DID-T

CAT5 Wired Digital Interpretation Chairman/Delegate Unit



Features

- Stylish, low profile design with touchable interface
- Standard CAT5e and RJ45 connectors are used in CLEACON series to provide more convenient on project and maintenance.
- The connection cable of units are either hiding underneath or from the rear of the unit, makes it convenient for different request of installation
- OLED screen, providing excellent brightness, contrast, wide viewing angle but low power consumption
- Internal high-fidelity loudspeaker
- Built-in interpretation channel selector
- The chairman VIS-DIC-T can set as interpreter or delegate unit.
- Head-set interface in both sides with volume adjust
- Line-in interface which allows microphone or other line-in device like cell phone, laptop to pass audio through to perform teleconference
- The unique AUDIO-LINK digital ring network technology achieve full-digital signal transmission and processing, completely avoid the RF interference from cell phone or similar devices.
- “Hand-in-Hand-Loop-Network” connection makes the system always working perfectly and more reliable.
- The unit showing time/date on the screen. Timer on display to set certain time for each delegate to speak, will remind user or close the MIC automatically.
- All units can be configured as Chairman or Delegate unit through software settings based on model VIS-DIC-T.

Functions

- Compliance with IEC 60914, GBT 15381-94
- The unique AUDIO-LINK digital ring network technology achieve full-digital signal transmission and processing, completely avoid the RF interference from cell phone or similar devices.
- Single CAT5e cable transmits 64 channels of audio and various information.
- High fidelity sound by zero loss audio transmit technology, 48K audio sampling frequency, 20Hz~20KHz

response frequency

- "Hand-in-Hand-Loop-Network" connection makes the system always working perfectly no matter changing discussion unit or having any malfunctioned units
- This system assigned to each unit independently ID to avoid duplicate ID conflict
- AGC (Automatic Gain Control)/AFC (Adaptive Feedback Cancellation)/ANC (Active Noise Control)/Mix (Auto-Mix) technology
- Build-in functions for intercom
- Hot-swap for any system unit, and the controller has auto-recovery function
- Precise cardioid directional microphone capsule with anti-wind microphone foam, with two-color LED indicator
- Button for MIC ON/OFF, Priority & Apply Answer button for chairman unit
- Built-in high-fidelity speakers, it automatically mutes to prevent howling when press MIC ON
- Head-set interface in both sides with volume adjust
- Without using PC software, our conference controller still owns following settings:
 - Limit on the number of speaking persons: By Setting the number of active units at the same time (Number is 1/2/4/6/ units)
 - Discussion modes:
"OPEN" Free for all, limited by the active units setting by controller, "OVERRIDE" First in First out, "VOICE" Can activate MIC by detecting sound without press button, "APPLY" To apply then to speak
- Work with VIS-CDC series HD camera and VIS-CATC-A switcher, it can realize camera auto tracking function
- The unit showing real time on the screen, and count-down timer for speaking person.

Control & Indicators

Each unit with two-color LED indicator, red for speaking on microphone, green means need acceptance from chairman to speak

128x32 OLED display with volume bar, clock, time span of microphone activating, MIC ON/OFF etc. and other information.

Indicator for Volume adjustment

Indicator for MIC ON/OFF

Chairman unit with priority button and consent button for the delegates

Interfaces

Pluggable gooseneck microphone base

2x 3.5mm stereo headphone jack

1x 3.5mm stereo input jack

2x RJ45 connectors

Technical Parameters

Button: Touchable interface

Sound Pickup: heart type capacitance

Display: OLED display 128 × 32
Sensitivity: -46 dBV / Pa
Maximum power consumption: 2.0W
Directivity: 0 ° / 180 ° > 20 dB (1 kHz)
Headphone load: 16Ω
headphone volume: 10mW
Headphone jack: 3.5mm stereo
Input impedance: 2kΩ
SNR: 70dB
Frequency response: 20 ~ 20000Hz
Connection: CAT5 / CAT6 cable + snap
Equivalent noise: 20dBA (SPL)
Main material: ABS
The maximum sound pressure: 125dB (THD <3%)
Weight: 1.1kg (with microphone)
Dimension: 195L × 120W × 60H mm (without microphone)
Operating temperature: 0 °C to + 55 °C
Color: Black

Item Model for Order

VIS-DIC-T.....Digital Discussion Interpretation Chairman Unit, microphone and cable not include
VIS-DID-T.....Digital Discussion Interpretation Delegate Unit, microphone and cable not included
VIS-M330.....330mm Microphone, with anti-wind foam cover
VIS-M410.....410mm Microphone, with anti-wind foam cover
VIS-M485.....485mm Microphone, with anti-wind foam cover
VIS-M600.....600mm Microphone, with anti-wind foam cover